



The Artisan Range Folding Door



CAPRAL
ALUMINIUM

ARTISANemt™
quietly the best and smoothest

Folding Doors open up the full potential of outside living by bringing the outside in. Panels can be stack out of the way to one or both sides making them an ideal solution for entertainment areas and maximising panoramic views. Smooth to operate the folding door can be manufactured in various configurations of up to 8 panels. The inclusion of quality seals and performance glass means they are suitable for areas with high wind and water requirements.

The Artisan Folding Door

Artisan incorporates a technologically advanced folding door system that surpasses that of ordinary bi-folds on the market.

It moves and feels like no other, because it's made like no other. At the heart of it all – Effortless Motion Technology (emt), Capral's AGS 'Smart Hinge' and 'Easy Gliding' Channel help make Artisan simply the best and smoothest folding door available today.

The Artisan folding door combines aluminium with high quality 316 marine grade stainless steel components. The integrated folding door system has excellent weather tightness, security, environmental performance, structural performance, size and function including internal and external 90° corners.

Features and Benefits:

- Incorporates AGS 'Smart Groove' technology for superior fabrication
- Heavy duty roller, capable of taking up to 100kg load per panel
- Tested water performance for both inward and outward opening configurations
- AGS Smart Hinge™ using marine grade stainless steel
- AGS multi-point locking system allows for dual side entry
- Effortless Motion Technology (EMT™) for flawless operation
- Top rolling system for smooth operation
- Australian Window Association 2017 Highly Commended Design Award - Euro spigot connectors that save factory fabrication time
- Bushfire tested to BAL-40

Finishes Available:

-  Powder coated range
-  Anodised Aluminium
-  Woodgrain



Maximum Recommended Panel Sizes

Height	3000mm
Width	1000mm
Weight	100kg

Frame Sizes

Options	Depth	Height
Channel Sill	101.6mm	2mm
Flat Sill	101.6mm	29mm
Std Sill	101.6mm	45mm
HP Sill	101.6mm	57mm

Maximum Product Performance

SLS (Pa)	up to 3000Pa
ULS (Pa)	up to 8000Pa
WATER (Pa)	450

Glazing Details

Single Glazed	4mm - 12mm
Thick Glazed	14mm - 18mm
Double Glazed	19mm - 31mm

Maximum Acoustic Rating


Rw	36
C;CTR	-1;-3

Compatible with

AGS 400/425 Series



Configurations

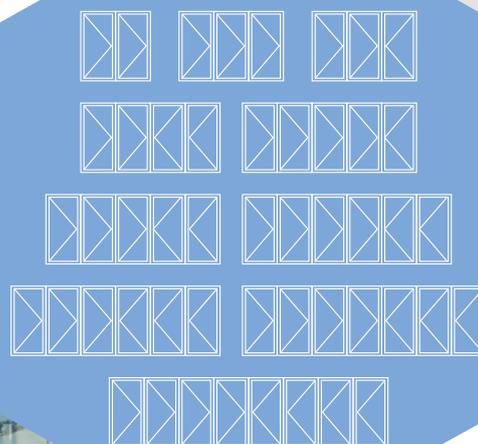

CAPRAL
ALUMINIUM

1800 ALUMINIUM (258 646)

www.capral.com.au

Capral Limited ABN 78 004 213 692 | August 2019